



電磁駆動式ダイヤフラムブロワ 型式：TIP-450

主要寸法

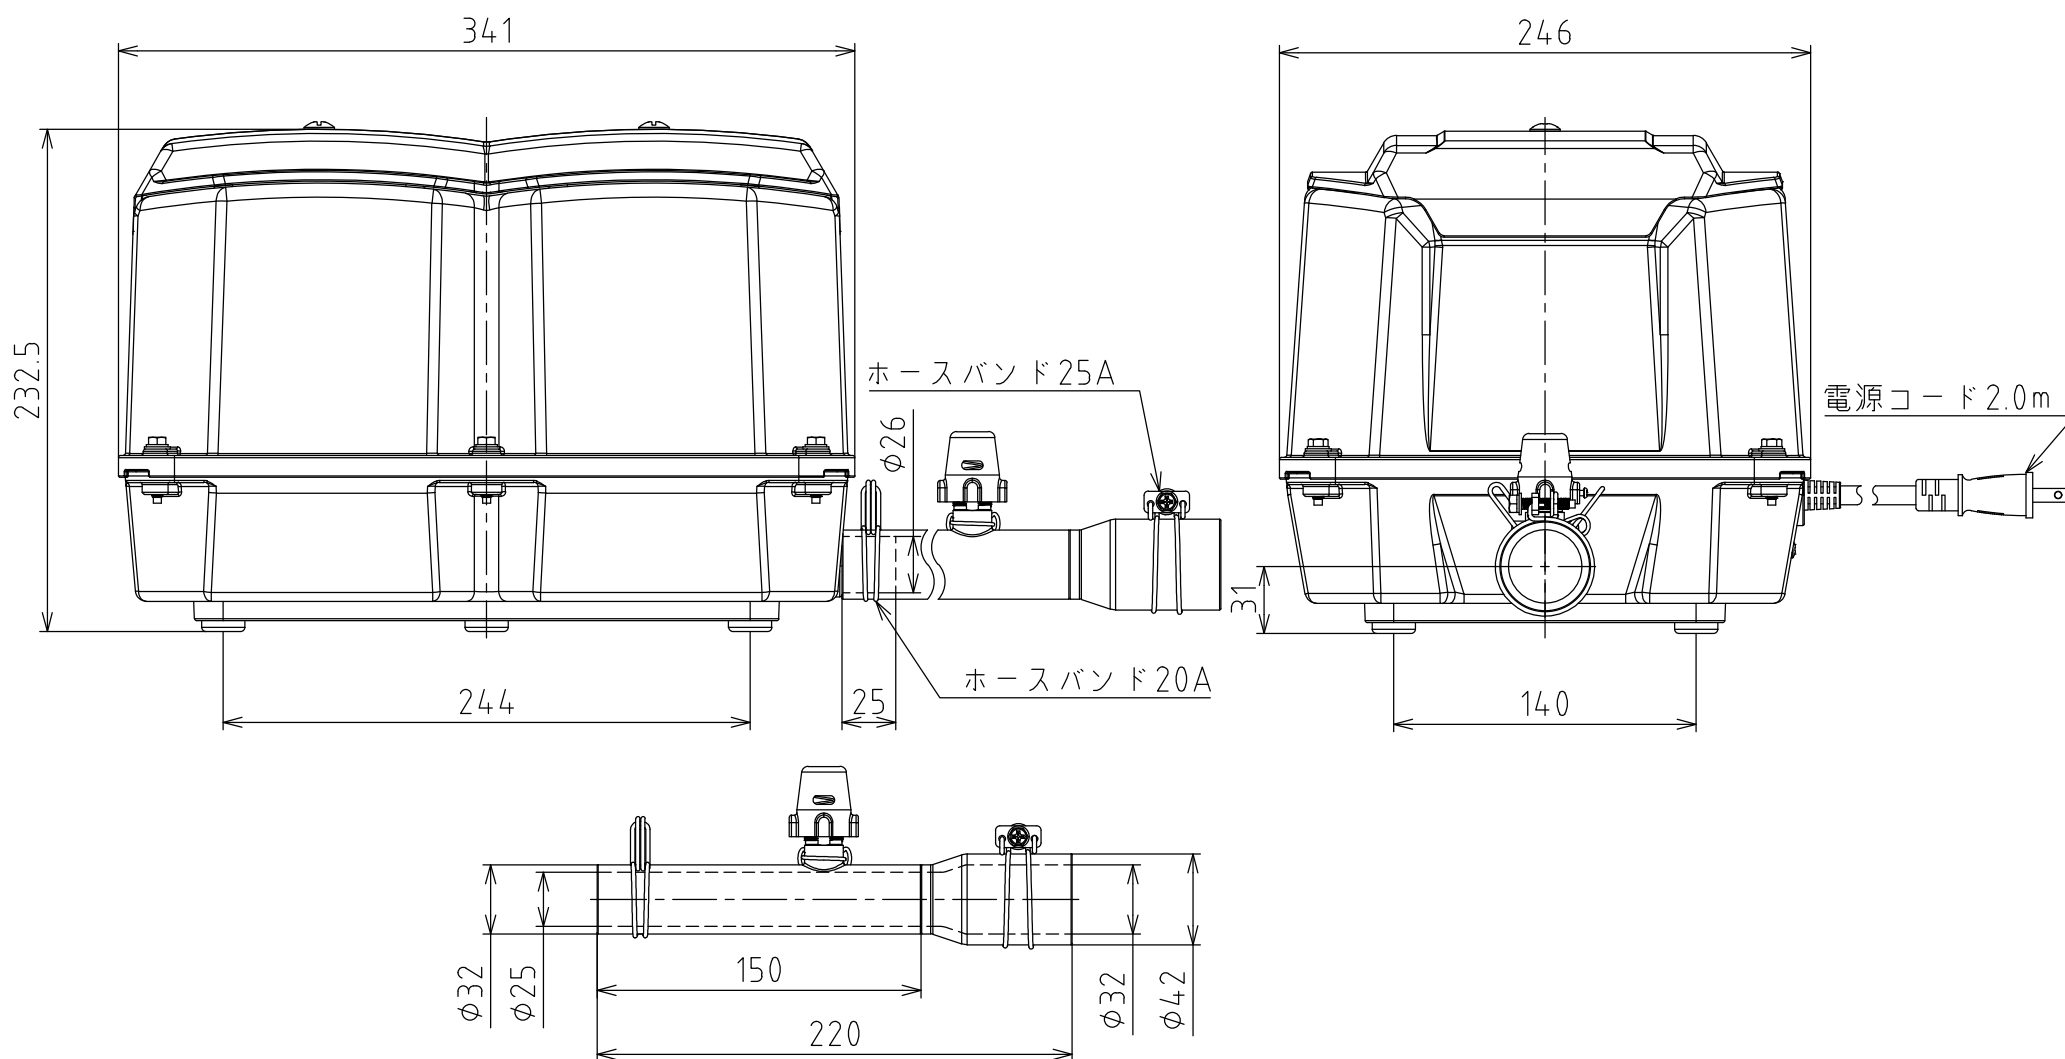

性能曲線

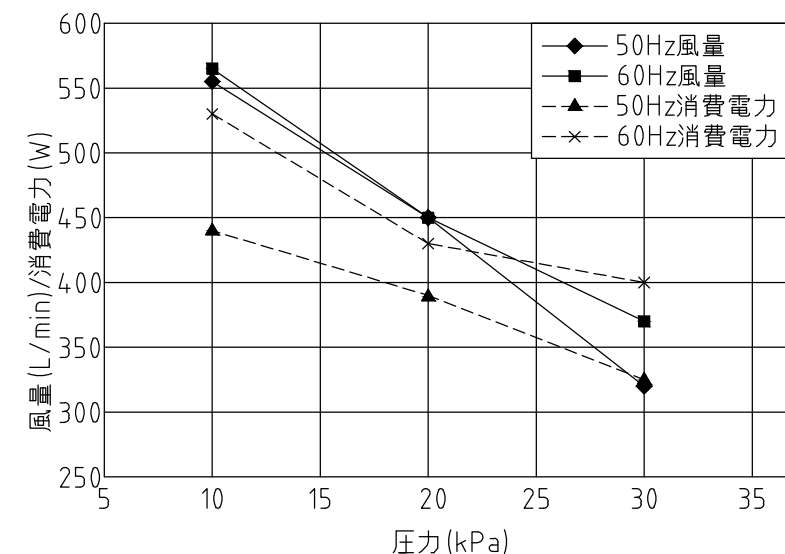

特性

	周波数 (Hz)	吐出圧力 (kPa)		
		10	20	30
風量 (L/min)	50	555	450	320
	60	565	450	370
電流 (A)	50	7.20	6.60	6.30
	60	8.40	7.10	6.10
消費電力 (W)	50	440	390	325
	60	530	430	400
騒音レベル dBA(1m)	50		54	
	60		54	

※性能曲線及び特性表は、このブロワの代表値であり保証値ではありません。

仕様

型式	仕様								
	定格電圧 (V)	定格周波数 (Hz)	定格消費電力 (W)	使用圧力範囲 (kPa)	常用圧力 (kPa)	風量 (常用圧力時) (L/min)	運転時間 (分/日)	接続管径 (mm)	質量 (kg)
TIP-450	単相100	50/60	390/430	10～30	20	450	連続	φ26 (VP-20)	18

予告なく、仕様・デザインを変更することがあります。
あらかじめご了承ください。

1					
2					
3					
4					
5					
6					
7					
8					
9					
10					
11					
12					
13					
14					
15					
16					
17					
18					
19					
20					
21					
22					
23					
24					
25					
26					
27					
28					
29					
30					
31					
32					
33					
34					
35					
36					
37					
38					
39					
40					
41					
42					
43					
44					
45					
46					
47					
48					
49					
50					
51					
52					
53					
54					
55					
56					
57					
58					
59					
60					
61					
62					
63					
64					
65					
66					
67					
68					
69					
70					
71					
72					
73					
74					
75					
76					
77					
78					
79					
80					
81					
82					
83					
84					
85					
86					
87					
88					
89					
90					
91					
92					
93					
94					
95					
96					
97					
98					
99					
100					

1				
番号 No.	名称 NAME	材料 MATERIAL	個数 Q'TY	備考 REMARKS
形式 TYPE	TIP-450	質量 MASS		18kg
名称 NAME	ITEM NO.	承認 APPROVED BY		高尾
完成品仕様図		審査 CHECKED BY		高尾
		作成 DRAWN BY		村上
		大晃工番 TAIKO KIKAI W.NO.		KE-1113
投影法 PROJECTION	第一角法	尺度 SCALE	NTS	図番 DRAWING NO.
日付 DATE	MAR.26.2021	サイズ SIZE	A3	TS809C608E-A1 1/1

TAIKO KIKAI INDUSTRIES CO., LTD.